


Computer Vision

James L. Crowley

M2R MoSIG
Lesson 6

Fall Semester
21 Nov 2019

Exercise Bayesian Detection and Tracking

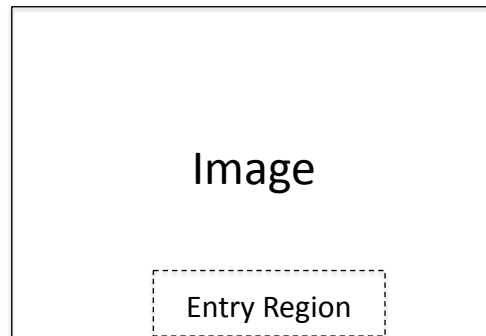

We can use background difference subtraction to build a simple Bayesian tracker for moving objects. Assume an image has I columns and J rows and that we are looking for new objects within an entry region (or window) of size $W \times H$ on the edge of the window.

- a) Explain how to use background difference subtraction to detect objects that enter a region via an entry region on the boundary of an image.
- b) Explain how to compute the center of gravity and spatial extent (second moment or covariance) for an object detected in an entry region.
- c) Explain how to predict a detection region (region of interest) for the next image from objects detected in the previous image using the position and spatial extent of the object.
- d) Explain how to update the center of gravity and spatial extent for an object from a new detection in the next image.
- f) Explain how to determine the width, length and orientation of the object from its covariance matrix.